


CLP motorized pumps

The long experience in the field has led us to select very reliable components with a particular focus on their energy efficiency and their silence.

Our systems can be powered, even at the same time, by diverse sources with different engines ranging from traditional electric motors to brushless electric motors to PTO driven by endothermic engines.

You can therefore combine pumps, even of different nature, by optimizing and managing different pressure / flow parameters for the various components by means of micro programmable controllers.

The standard range offers electric motors from 0.8 to 3 kW with or without electronic flow control.

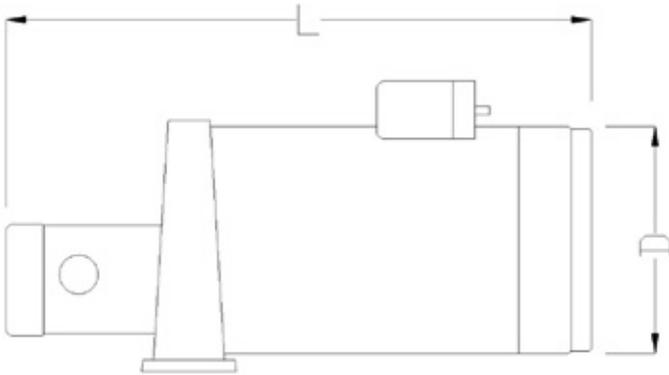

Technical Data

Ref.	Description	L (mm)	D (mm)
CLP-0K8-24	800W 24V Pump	280	80
CLP-2K-24	2 kW 24V Pump	366	114
CLP-3K-24	3 kW 24V Pump	408	160